




Features

- No additional wall or trap stabilizer kit required
- Tub filler: Maximum flow rate: 15 gpm (60.6 L/min) at 60 psi
- Handshower: Maximum flow rate: 2.5 gpm (9.5 L/min) or 2.0 gpm (7.6 L/min) for "WE" (water efficient) model
- Rotatable handshower bracket may be placed on COLD or HOT side of body
- 1/4 turn ceramic disc cartridges
- Rough valve sold separately (9516)
- Replace "XX" with desired handle series
- Solid brass construction
- Over 30 finishes including 14 PVD finishes


Codes/Standards Applicable

- Meets or exceeds the following at date of manufacture:
- ASME A112.18.1/CSA B125.1

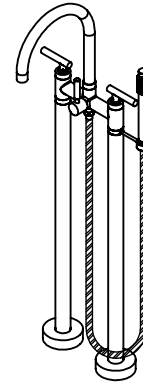

1103-XX WE-1103-XX

XX = DENOTES
HANDLE SERIES

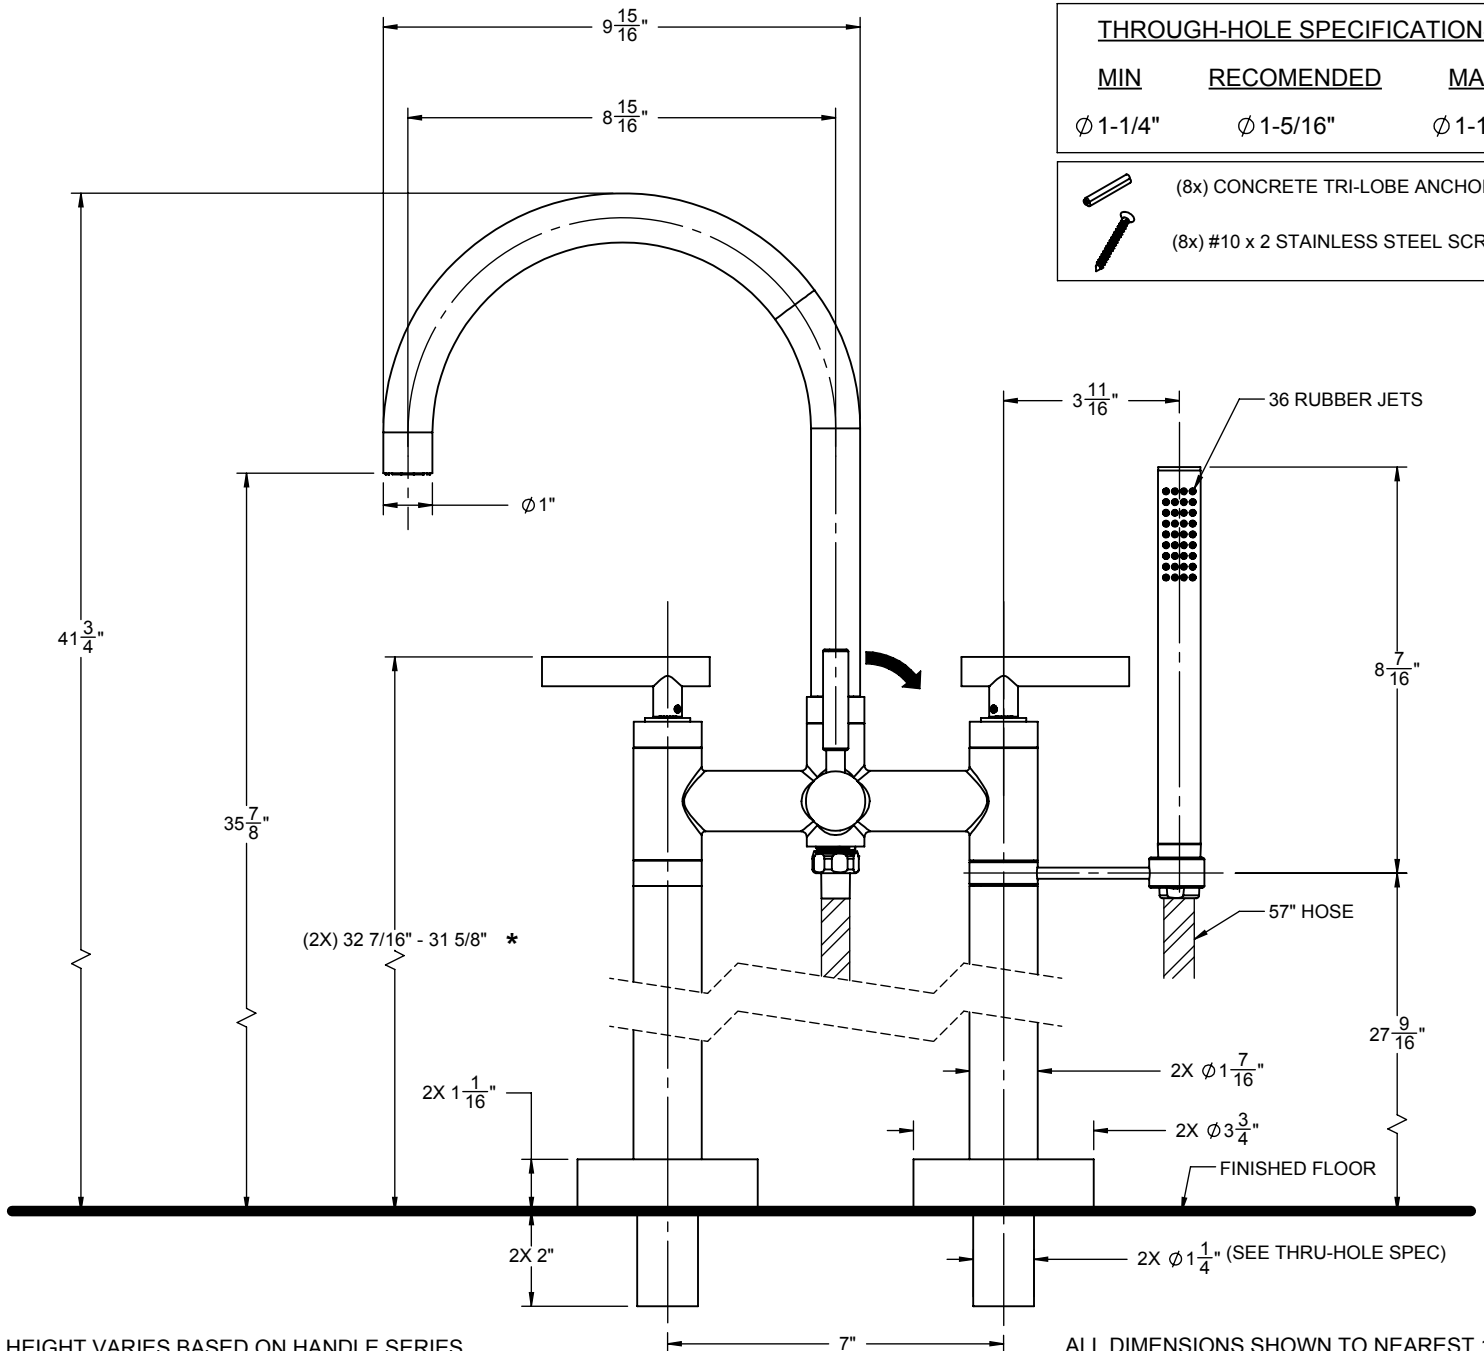

* HEIGHT VARIES BASED ON HANDLE SERIES

ALL DIMENSIONS SHOWN TO NEAREST 1/16"