

STEAM GENERATOR

SPECIFICATION SHEET



MODEL: AT/3T SERIES WITH T100 TOUCH CONTROL AND ADT AUTO DRAIN

Generator Features

- "Soft Steam" Element Switching
- Stainless Steel Water Reservoir
- Electronic Water Level Control System With Stainless Steel Probes
- Solid State Circuitry With Snap-In Cable Connections
- Removable Heating Elements for Easy Replacement
- 5-Year Parts Warranty & 2-Year Labor Warranty for Residential Installations.

Codes/Standards

- ETL listed for USA & Canada
- CE
- City of Chicago Plumbing Code
- City of Los Angeles
- The City of New York Department of Buildings
- Metropolitan Dade County, Florida
- Commonwealth of Massachusetts
- Ontario ESA

Control Features

- Touch Screen Operation for Easy Control of Temperature and Time Settings
- Large Screen Displays Steam Bath Temperature and Time of Day
- Displays Temperature in Fahrenheit or Celsius
- Sleep Mode with Integral Sensor to Activate Screen When Approached
- Delayed Start Feature to Pre-heat Steam Room at Selected Time
- Multiple language Settings Including English, French and Spanish
- Remote Mounted Sensor Allows Control to be Mounted Inside or Outside Steam Room
- Flush-mount, Low-profile Installation



T100 Touch Control

INSTALLATION VIEW



AT Generator

Steam Generator Specification Chart

Model Number	Item Number	kW Rating	Max. Cu. Ft. Range*	Electrical Specifications				Dimensions L x D x H
				Volts	Phase	Amps	Breaker	
AT5	9015-2001	5.0	100	240	1	20.8	30	16.5" x 6.25" x 13"
		3.7	60	208	1	18.1	25	
AT7	9015-4001	7.0	220	240	1	29.2	40	16.5" x 6.25" x 13"
		5.2	110	208	1	25.3	35	
AT10	9015-6001	10.0	400	240	1	41.7	60	16.5" x 6.25" x 13"
		7.5	250	208	1	36.1	50	
AT12**	9015-7001	12.0	500	240	1	16.7/33.3	25/50	16.5" x 6.25" x 14"
		9.0	350	208	1	14.4/28.9	20/40	
AT14**	9015-8001	14.0	600	240	1	20.8/37.5	30/50	16.5" x 6.25" x 14"
		10.5	450	208	1	18.0/32.5	25/50	
AT17***	9025-1001	17.0	725	240	System consists of AT10 & AT7, see above for specifications.			2 @ 16.5" x 6.25" x 13"
		12.75	530	208				
AT20***	9025-2001	20.0	900	240	System consists of two (2) AT10's, see above for specifications.			2 @ 16.5" x 6.25" x 13"
		15.0	625	208				
AT30****	9025-5001	30.0	1350	240	System consists of three (3) AT10's, see above for specifications.			3 @ 16.5" x 6.25" x 13"
		22.5	935	208				
3T8	9015-5201	7.9	75	208	3	21.9	30	16.5" x 6.25" x 14"
3T10	9015-6201	10.1	400	208	3	28.1	35	16.5" x 6.25" x 14"
3T12**	9015-7201	11.3	500	208	3	31.3	40	16.5" x 6.25" x 14"
3T14**	9015-8201	14.0	600	208	3	40.2	50	16.5" x 6.25" x 14"
3T20***	9025-2201	20.2	800	208	System consists of two (2) 3T10's, see above for specifications.			2 @ 16.5" x 6.25" x 14"
3T24***	9025-3201	22.6	1000	208	System consists of two (2) 3T12's, see above for specifications.			2 @ 16.5" x 6.25" x 14"
3T28***	9025-4201	28.0	1200	208	System consists of two (2) 3T14's, see above for specifications.			2 @ 16.5" x 6.25" x 14"
3T36****	9025-6201	33.9	1500	208	System consists of three (3) T12's, see above for specifications.			3 @ 16.5" x 6.25" x 14"

* Refer to steam sizing guide to determine proper kW size generator for the steam room space.
 ** Single phase AT12 & AT14 generators require two (2) separate line circuits and two (2) steam heads for each generator.
 *** Three phase 3T12 & 3T14 generators require two (2) steam heads for each generator.
 **** AT17 & AT20 include two (2) generators connected to function as one (1) system with one (1) control.
 ***** AT30 includes three (3) generators connected to function as one (1) system with one (1) control.
 Multiple unit ganged systems require one (1) or two (2) steam heads for each generator. Order heads separately.
 Multiple unit ganged systems require one (1) drain valve kit for each generator. Drain valve kits are included.

Required Steam Head Ordered Separately
 CFSH, Available in Chrome, Polished Brass, Polished Nickel, Brushed Nickel and Oil Rubbed Bronze.

Electrical Service Information

Dedicate circuit required. See specification chart.
 All electrical wiring to be installed by a licensed electrician in accordance with local and national codes.

Plumbing Information


- Water Inlet – 3/8” NPT
- Pressure Relief Valve – 3/4” NPT
- Steam Outlet – 1/2” NPT
- Drain Outlet – 1/2” NPT
- Follow local plumbing codes.

Generator Shipping Weight & Dimensions

AT5-14, 3T8-14:	35 Lbs. / 16 Kgs. 23” x 20.5” x 7.5”
AT17-20, 3T20-28:	65 Lbs. / 30 Kgs. 24” x 21” x 15”
AT30, 3T36:	105 Lbs. / 48 Kgs. 24” x 21” x 22”

Installation Information

- Mount in dry, well ventilated area, not exposed to freezing temperatures.
- Mount generator level, on its base or hung on a wall.
- Provide adequate access serviceability.
- Run 3/8” copper cold water line. Install shut off valve, but do not use a saddle valve.
- Run 1/2” copper steam line, not exceed 20 ft. in length. Slope pipe to avoid condensation build up. Do not create traps.
- Run 3/4” copper pressure relief line and terminate in accordance with local and national codes.
- Run 1/2” copper drain line, sloping pipe to gravity flow drain. Do not terminate drain into the steam room.
- Steam head to be mounted 18” above floor or 6” above rim of bathtub and as far away from seating area as possible.

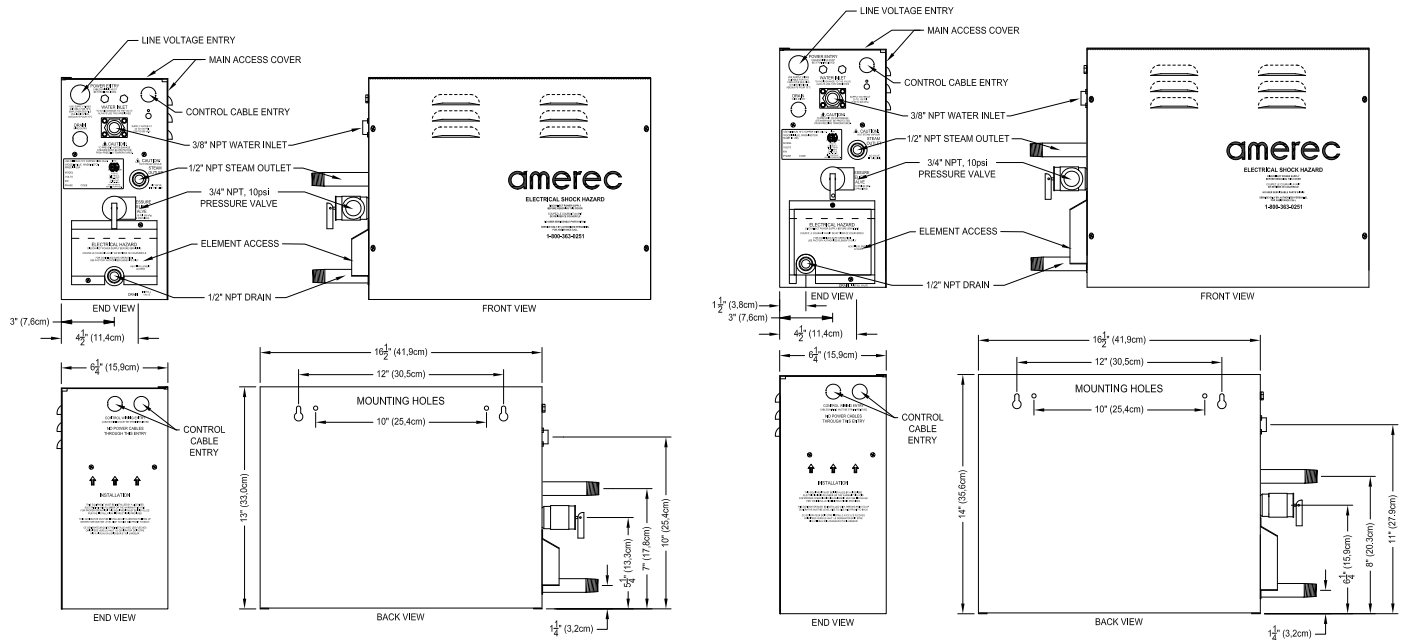

Not intended for use as installation instructions.
Refer to specific generator model installation instructions for further detail.

AMEREC STEAM
 P.O. Box 2258 | 17683 128th Place NE, #C | Woodinville, WA 98072, USA
 Toll-Free 1-800-331-0349
 amerec@amerec.com | www.amerec.com



Amerec reserves the right to change specifications and design without notice.
 © 2011 Amerec Steam