

METRO

Wall-Hung Toilet

C-2340

Product Features

- Vitreous china wall-mount toilet
- Anti-microbial, non-staining porcelain glaze
- Dual-flush capable; can be paired with most in-wall tank systems
- Can be mounted at standard or ADA height (installation height of 15" to 19")

Flushing System

- 1.6 / 0.8 gpf (6 / 3 Lpf) dual-flush
- High-performance, low water consumption
- Fully-glazed, 3.15" (80 mm) internal trapway

Accessories Included

- Toilet seat and cover, with slow-close hinges
- Solid metal bolts and caps (2 each)

Quality Assurance

- 100% flush-tested
- 2-year product warranty



Flush Action	Water Consumption	Trapway Diameter	Water Surface Area
Dual Flush	1.6 / 0.8 gpf (6 / 3 Lpf)	3.15" (80 mm)	5" x 4" (125 x 100 mm)

Available Options

Porcelain Glaze		Toilet Seat	
<input type="checkbox"/> .00 – White (Standard)	<input type="checkbox"/> .06 – Biscuit	<input type="checkbox"/> .00 – White (Standard)	<input type="checkbox"/> .06 – Biscuit

Product Color Options




.00 – White



.06 – Biscuit

METRO**Wall-Hung Toilet**

C-2340

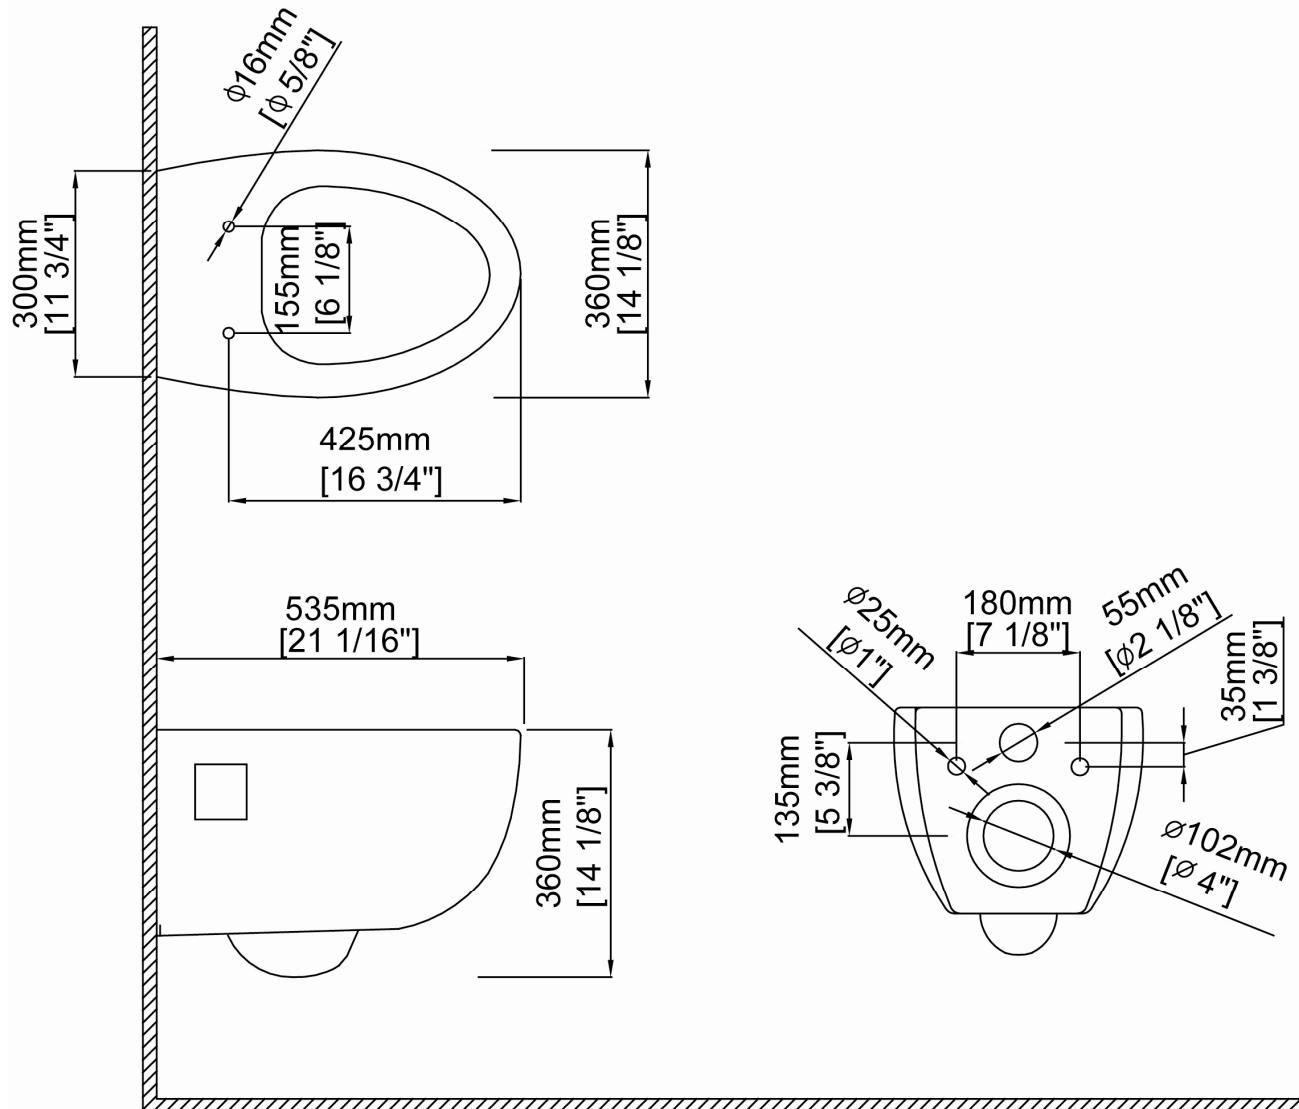

Nominal Dimensions	Compliance Certifications
<ul style="list-style-type: none"> 21-1/16" x 14-1/8" x 14-1/8" 535 x 360 x 360 mm <p>IMPORTANT: Dimensions of fixtures are nominal and may vary within the range of tolerance established by NSI Standard A112.19.2. These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.</p>	<p><i>Meets or exceeds the following specifications:</i></p> <ul style="list-style-type: none"> ASME A112.19.2M CSA B45.1 EPA WaterSense high-efficiency toilet (HET) <p> Meets the Americans With Disabilities Act guidelines and ANSI A117.1 requirements for accessible building facilities. Check local codes.</p>