TSU141 SPECIFICATIONS

opus·2 deck-mounted basin mixer

FEATURES:

- Three-hole deck-mounted sequential control basin mixer
- Durable, polished chrome finish and sleek design
- Brass valve body
- 8" spout with Neoperl laminar flow aerator
- Ceramic disk valve cartridge for drip-free performance
- Includes NPT flexhose water supply

SPECIFICATIONS:

Warranty:	Limited lifetime warranty (residential)
	One year warranty (commercial)
Connection:	NPT 1/2"
Material:	Brass body
Flow rate:	1.5 gpm @ 60 psi

FINISHES: Polished chrome

ACCESSORIES:

Requires push button waste TW120 or TW121


INSTALLATION:


Install this product according to the installation guide. Our products must be installed by certified professionals only and according to our installation guide as well as federal, provincial/state and local building codes and regulations.

CARE AND MAINTENANCE: See Installation Manual

CODES / STANDARDS APPLICABLE:

- Meets or exceeds ANSI / ASME standard A112.18.1 and CAN / CSA B125.1-05 requirements
- Listed with IAPMO bearing the UPC / cUPC mark
- California AB1953 compliant

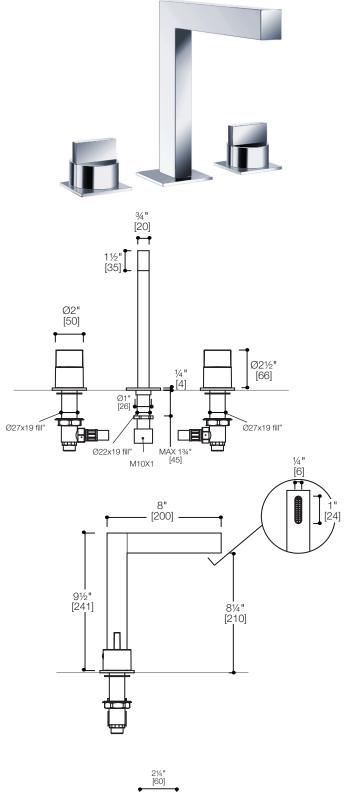







Note: These dimensions and specifications are subject to change without notice.

*Approximate measurements for comparison only.

*CAL*Green

2013-06