

TSU922 SPECIFICATIONS

opus·2 in-wall thermostatic mixer

FEATURES:

- In-wall thermostatic mixer with 2 port diverter
- Durable, polished chrome finish and sleek design
- Brass valve bodies
- NPT connection
- Requires TS922 rough-in

SPECIFICATIONS:

Warranty: Limited lifetime warranty (residential)
One year warranty (commercial)

Material: Brass body

Flow rate: 14.0 gpm @ 60 psi

FINISHES:

Polished chrome

ACCESSORIES:

Requires rough-in TS922

INSTALLATION:




Install this product according to the installation guide.
Our products must be installed by certified professionals only and according to our installation guide as well as federal, provincial/state and local building codes and regulations.

CARE AND MAINTENANCE:

See Installation Manual

CODES / STANDARDS APPLICABLE:

- Meets or exceeds ANSI / ASME standard A112.18.1 and CAN / CSA B125.1-05 requirements
- Listed with IAPMO bearing the UPC / cUPC mark

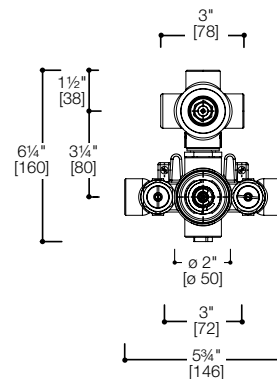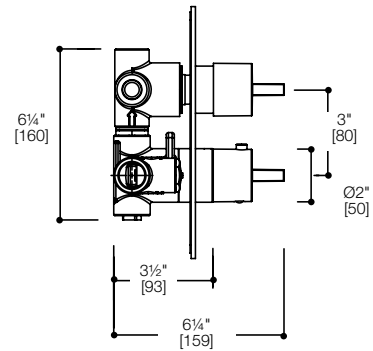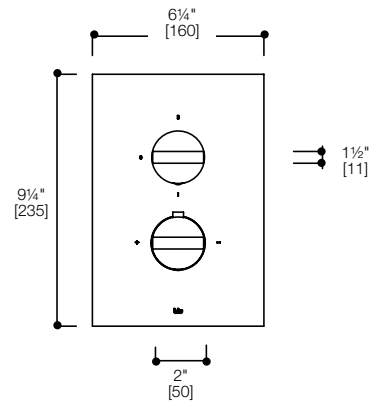

*Approximate measurements for comparison only.
Note: These dimensions and specifications are subject to change without notice.