


TSU821 SPECIFICATIONS

opus·2 pressure balancing mixer with positive shut-off diverter

FEATURES:

- Pressure balancing mixer with positive shut off diverter, square trim
- Durable, polished chrome finish and sleek design
- Solid brass valve body
- Pressure balancing anti-scald valve
- Adjustable temperature limit stop to control hot water temperature
- Integral shut-off / check valve
- NPT connection



SPECIFICATIONS:

Warranty:	Limited lifetime warranty (residential) One year warranty (commercial)
Material:	Brass body
Flow rate:	6.4 gpm @ 60 psi

FINISHES:

Polished chrome

ACCESSORIES:

Requires rough-in TS820.RN

INSTALLATION:




Install this product according to the installation guide. Our products must be installed by certified professionals only and according to our installation guide as well as federal, provincial/state and local building codes and regulations.

CARE AND MAINTENANCE:

See Installation Manual

CODES / STANDARDS APPLICABLE:

- Meets or exceeds ANSI / ASME standard A112.18.1 and CAN / CSA B125.1-05 requirements
- Listed with IAPMO bearing the UPC / cUPC mark

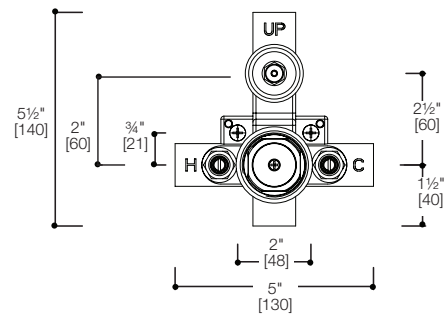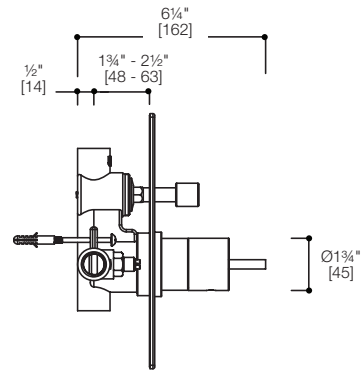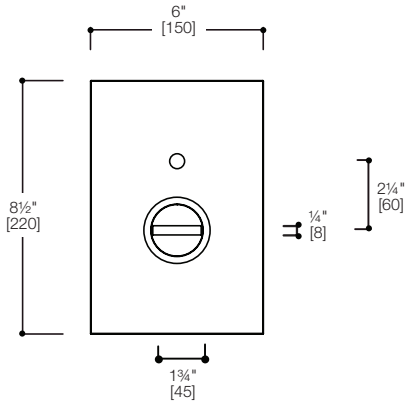

*Approximate measurements for comparison only.
Note: These dimensions and specifications are subject to change without notice.